

WHEELS AND TIRES

OUTLINE 12— 2
SPECIFICATIONS 12— 2
WHEELS..... 12— 2

86U12X-501




OUTLINE

The design of the wheels is changed from a 4-lug to a 5-lug design.

SPECIFICATIONS

Wheel					Tire		
Model	Material	Offset	Diameter of pitch circle	Size	Size	Tire pressure	
Turbo	Aluminum alloy	42 mm (1.65 in)	114.3 mm (4.5 in)	6JJ x 15	P195/60HR15	Front	216 kPa (2.2 kg/cm ² , 32 psi)
					P195/60R15 87H	Rear	177 kPa (1.8 kg/cm ² , 26 psi)
Non-Turbo	Steel or aluminum alloy	42 mm (1.65 in)	114.3 mm (4.5 in)	5 1/2JJ x 14	P185/170R14	Front	216 kPa (2.2 kg/cm ² , 32 psi)
				6JJ x 15	P195/60HR15		
					P195/60R15 87H	Rear	177 kPa (1.8 kg/cm ² , 26 psi)
Temporary spare tire							
Turbo Non-Turbo	Steel	53 mm (2.09 in)	114.3 mm (4.5 in)	4J x 15	T125/70D15	412 kPa (4.2 kg/cm ² , 60 psi)	

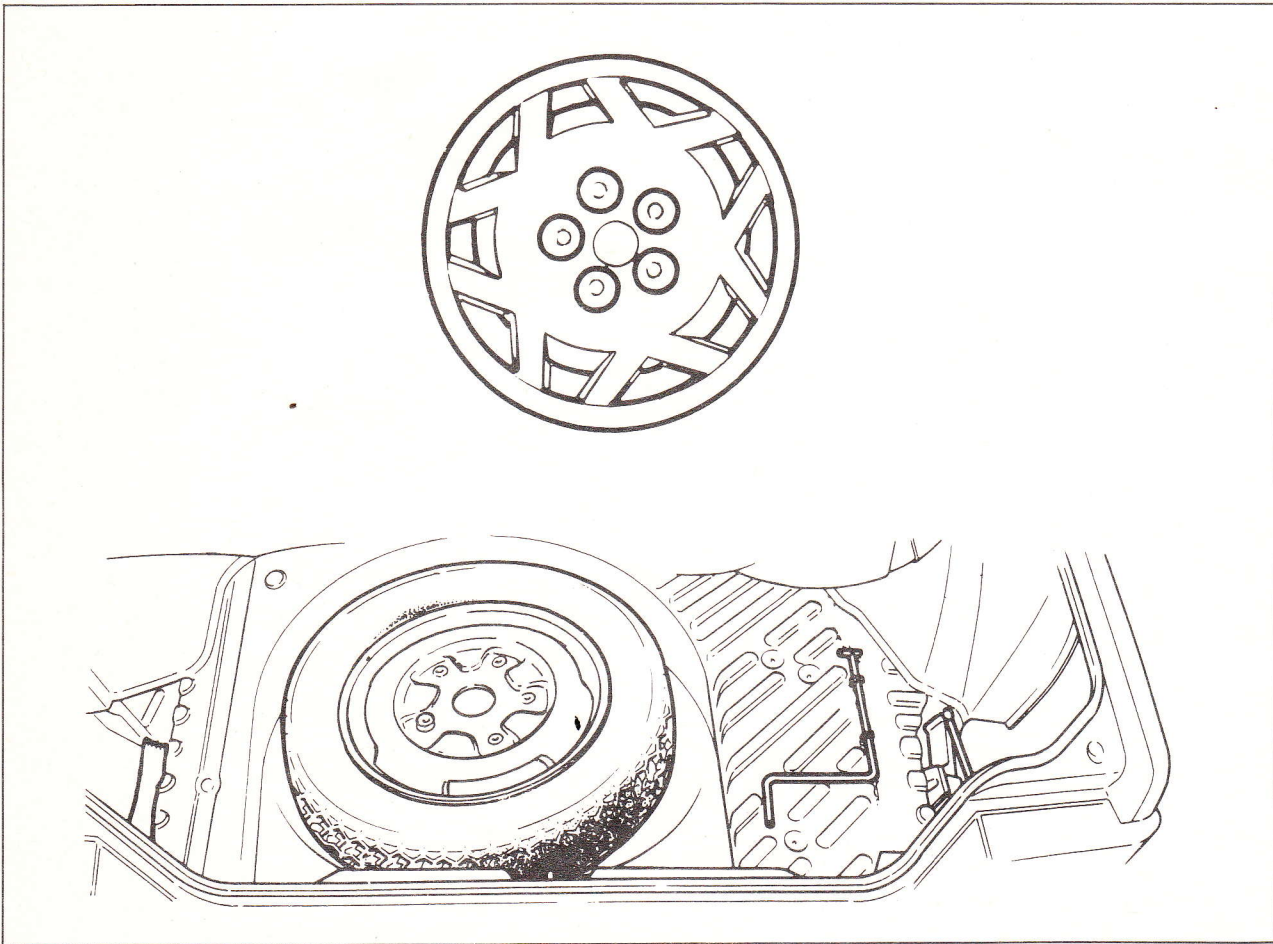

86U12X-502

WHEELS

The wheels are a five-lug design. There are two standard wheel sizes: 14 in and 15 in. The specified wheel lug tightening torque is **88 to 118 N-m (9.0 to 12.0 m-kg, 65 to 87 ft-lb)**.